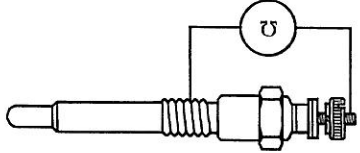



Two Wire, With Built In Connector Internally Grounded with an Internal Switch to disconnect the pull coil. With the solenoid oriented looking directly into the connector and the plunger pointed down the terminal on the left will be the Pull Coil Connection. The terminal on the right will be the Hold Coil Connection. Both coils will reference Ground through the coil case.

Allowable Limit	Factory Specification	Item
—	Approx. 0.9 Ω	 <p>Glow plug</p>
—	Approx. 0.38 Ω	All models Resistance (Terminal 1 - body)
—	Approx. 15.58 Ω	All models Resistance (Terminal 2 - body)
 <p>Stop solenoid</p>		