Citymaster 650 1470.15
12.0.7 Circulating water

97161384

circulating water pipe in the front car via Hydraulic hose package.
No fixation provided by cable ties, ensure free movement.
Direction of view: From the front/bottom, against the
Direction of travel, through hose shaft

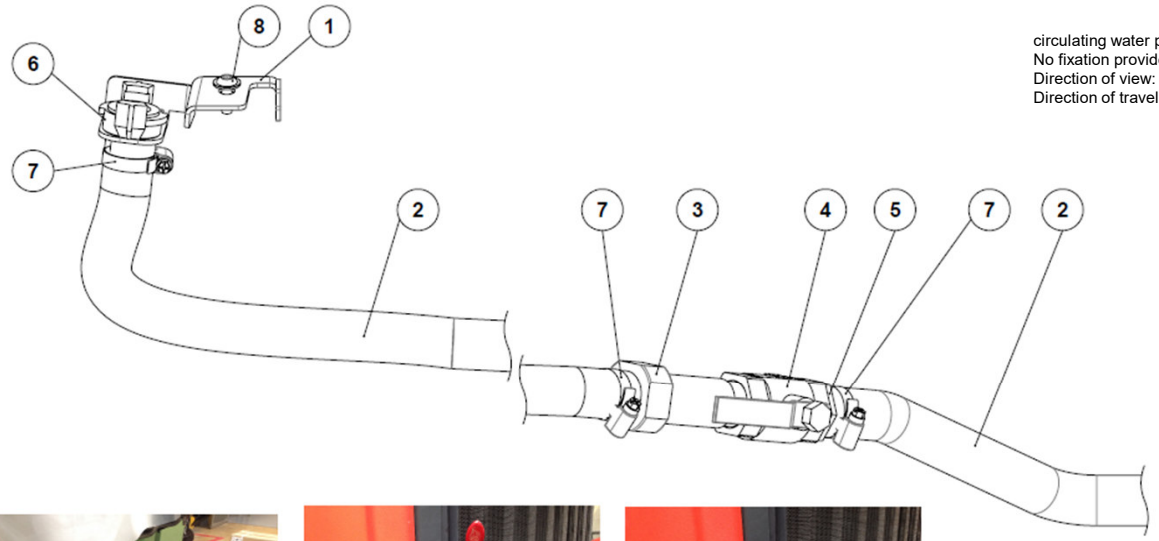

Bild 1

Bild 2

Bild 3

Bild 4



Pay attention to the installation position and swivel area of the ball valve!
- Mounting position = lever parallel to the rear carriage frame (Fig. 5)
- Lever is up = ball valve closed (Fig. 3)
- Lever is along the flow direction = ball valve opened Figure 4)

Pos.Nr.	Menge	Sach-Nr.	Beschreibung
1	1	96164843	Halter vollst
2	2	92070366	Spiralschlauch 25857376-1200
3	1	90678418	Verbindungsrohr
4	1	90655093	Kugelhahn DN25 R1
5	1	18535153	Rillenstutzen DN 25 G1
6	1	18535088	S-SCHLAUCHSTÜCK 1
7	4	17533290	SCHLAUCHSCHELLE DIN 3017-A-20-32X9-W3
8	1	11177136	LINSENFLANSCHSCHR.M.I-6KT.M8X20-10.9 A2G

Bild 5

Make sure free movement
of the lever to fairing =
10+/-5 mm.
Bend if nessacary

Werkstück-Außenkante DIN ISO 13715
A Beliebig bis 0,5
C Scharfkantig von 0 bis -0,2
D Gratfrei von -0,2 bis -0,5
Unbem. Innenkant. R0,4 bis R1,2

Maßstab 1:2
Benennung: Umlaufwasser Fahrzeug kpl
Zeichnungs-Nr.: 97161384
Blatt/Anz.: Blatt: 1
Konstr. Freigabe: D
A2 SW
Hako GMBH D-23840 BAD OLDESLOE
Einget.lt. 4000-19 06.11.19 Hoff/JF
Gezeichnet 21.08. Fa
Geprüft JF
Diese Maße werden vom Empfänger besonders geprüft.
Ersatz für:
Zeichnungs-Nr.: 0000-00
Änderungs-Nr.: