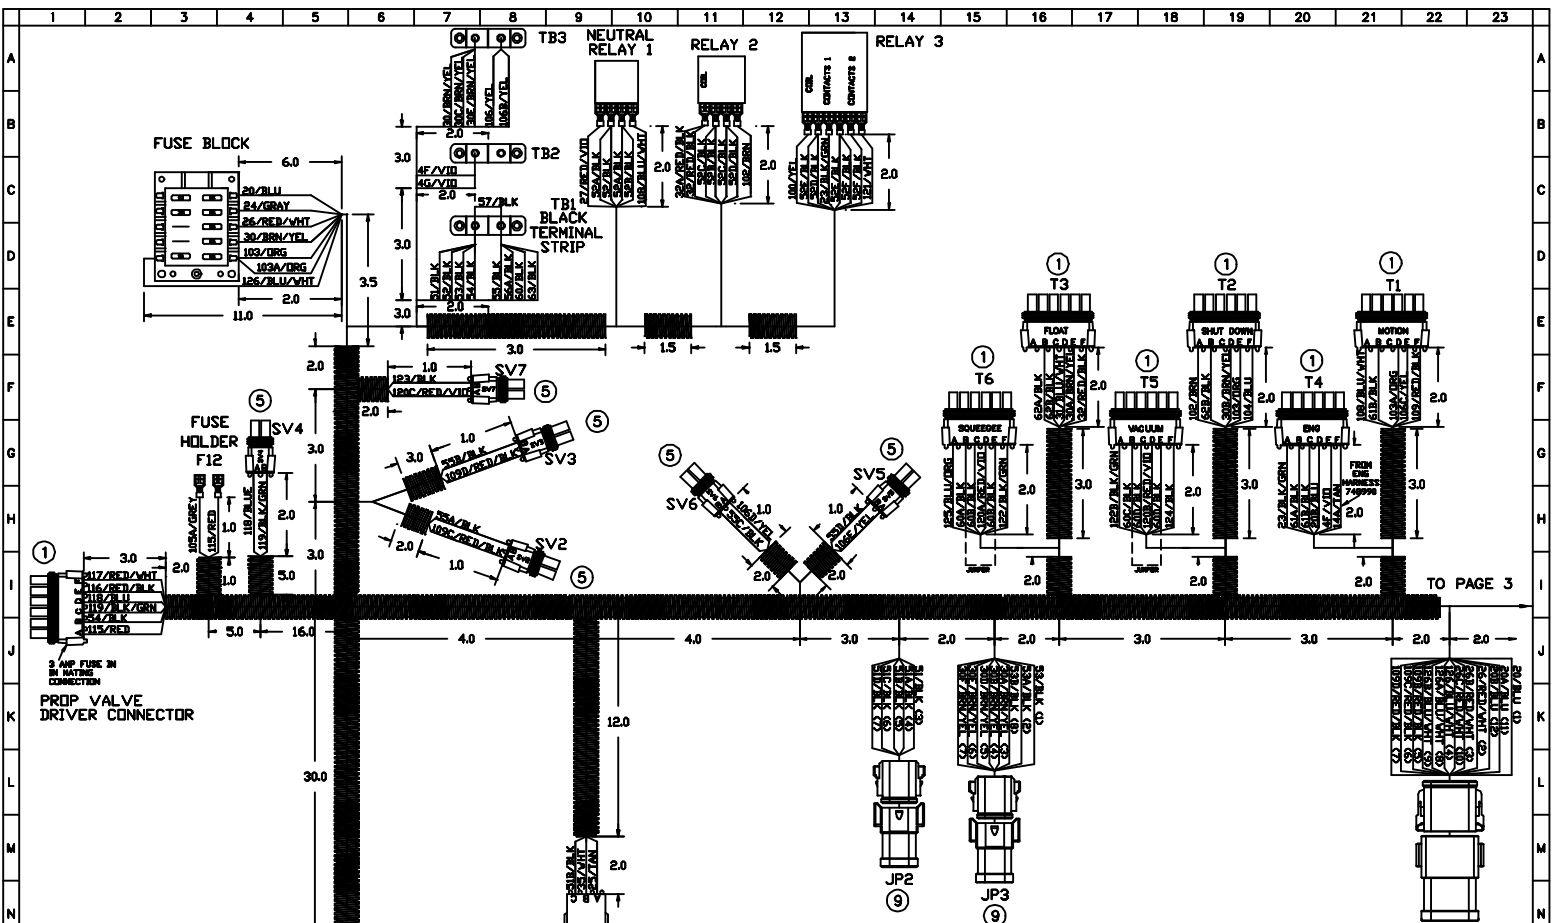


| LEGEND NUMBER | CONNECTOR MFG. PART # | VENDOR | CONNECTOR |
|---|---|---|---|
| 1 | 12020926 | POWER & SIGNAL GROUP | WEATHER PACK 6 POSITION MALE |
| 2 | 12020827-B | POWER & SIGNAL GROUP | WEATHER PACK 3 POSITION FEMALE |
| 3 | 12020829-B | POWER & SIGNAL GROUP | WEATHER PACK 3 POSITION MALE |
| 4 | 12010973 | POWER & SIGNAL GROUP | WEATHER PACK 3 POSITION FEMALE |
| 5 | 12015792 | POWER & SIGNAL GROUP | WEATHER PACK 2 POSITION MALE |
| 6 | 12015792 | POWER & SIGNAL GROUP | 2 POS MALE WITH 12015323 SEALS |
| 7 | 12010973 | POWER & SIGNAL GROUP | 2 POS FEMALE WITH 12015323 SEALS |
| 8 | DT06-4S | LADD DISTRIBUTION | DEUTSCH 4 POS PLUG, & W4S WITH DT04-4P-EP13 BUSS |
| 9 | DT06-08S | LADD DISTRIBUTION | DEUTSCH 8 POS PLUG, & W8S WITH DT04-08P-P020 BUSS |
| 10 | DT06-12S | LADD DISTRIBUTION | DEUTSCH 12 POS PLUG, & W12S WITH DT04-12P-P028 BUSS |
| 11 | DT06-12S | LADD DISTRIBUTION | DEUTSCH 12 POS PLUG, & W12S WITH DT04-12P-P030 BUSS |

NOTES:
ALL WIRE TO BE SAE J1128 TXL
ALL EIGHT DIGIT TERMINAL NUMBERS ARE DELPHI PACKARD ELECTRIC UNLESS OTHERWISE NOTED

| REV | E.C.N. | DATE | CHANGE | BY | CHK BY |
|---|---|---|---|---|---|
| E | MIN-13527 | 08/07/17 | ADD DRY SWEEP CONN (SHT 2) | KHH | JVP |
| D | MIN-13335 | 09/15/16 | ADD JUMPER PLUGS & SHT 4 | KHH | JVP |
| C | MIN-13191 | 03/10/16 | ADD CONN SEAL PLUGS | KHH | JVP |
| B | MIN-13144 | 01/06/16 | HEAD LIGHT CONN-SWAP 35 & 51B | KHH | JVP |

CONFIDENTIAL
THIS DRAWING AND ALL INFORMATION CONTAINED THEREIN ARE THE EXCLUSIVE PROPERTY OF MINUTEMAN INTERNATIONAL, INC. THIS DRAWING IS NOT TO BE COPIED OR OTHERWISE REPRODUCED WITHOUT EXPRESSED WRITTEN PERMISSION OF MINUTEMAN INTERNATIONAL, INC. IN ADDITION, THIS DRAWING MUST BE RETURNED UPON REQUEST. FURTHER, ALL INFORMATION CONTAINED HEREIN MUST BE MAINTAINED CONFIDENTIAL.

TITLE NAUTILUS, MAIN, HARNESS — SCALE NTS
MATERIAL SEE_NOTES — FINISH SEE_NOTES
TOLERANCES (UNLESS OTHERWISE SPECIFIED): 0-1" ± 1/16; >1-12" ± 1/4"; <12" ± 1/2"; .000 ± .005; .00 ± .010; ANGLES ± 30'
SIZE C — DRAWN BY MB — DATE 03/25/2014 — CHECKED BY JWP — DATE 03/25/2014
14000 U.S. ROUTE 20 PINGREE GROVE, IL 60140
P.N. 748799 — REV E — SHEET 1 OF 4

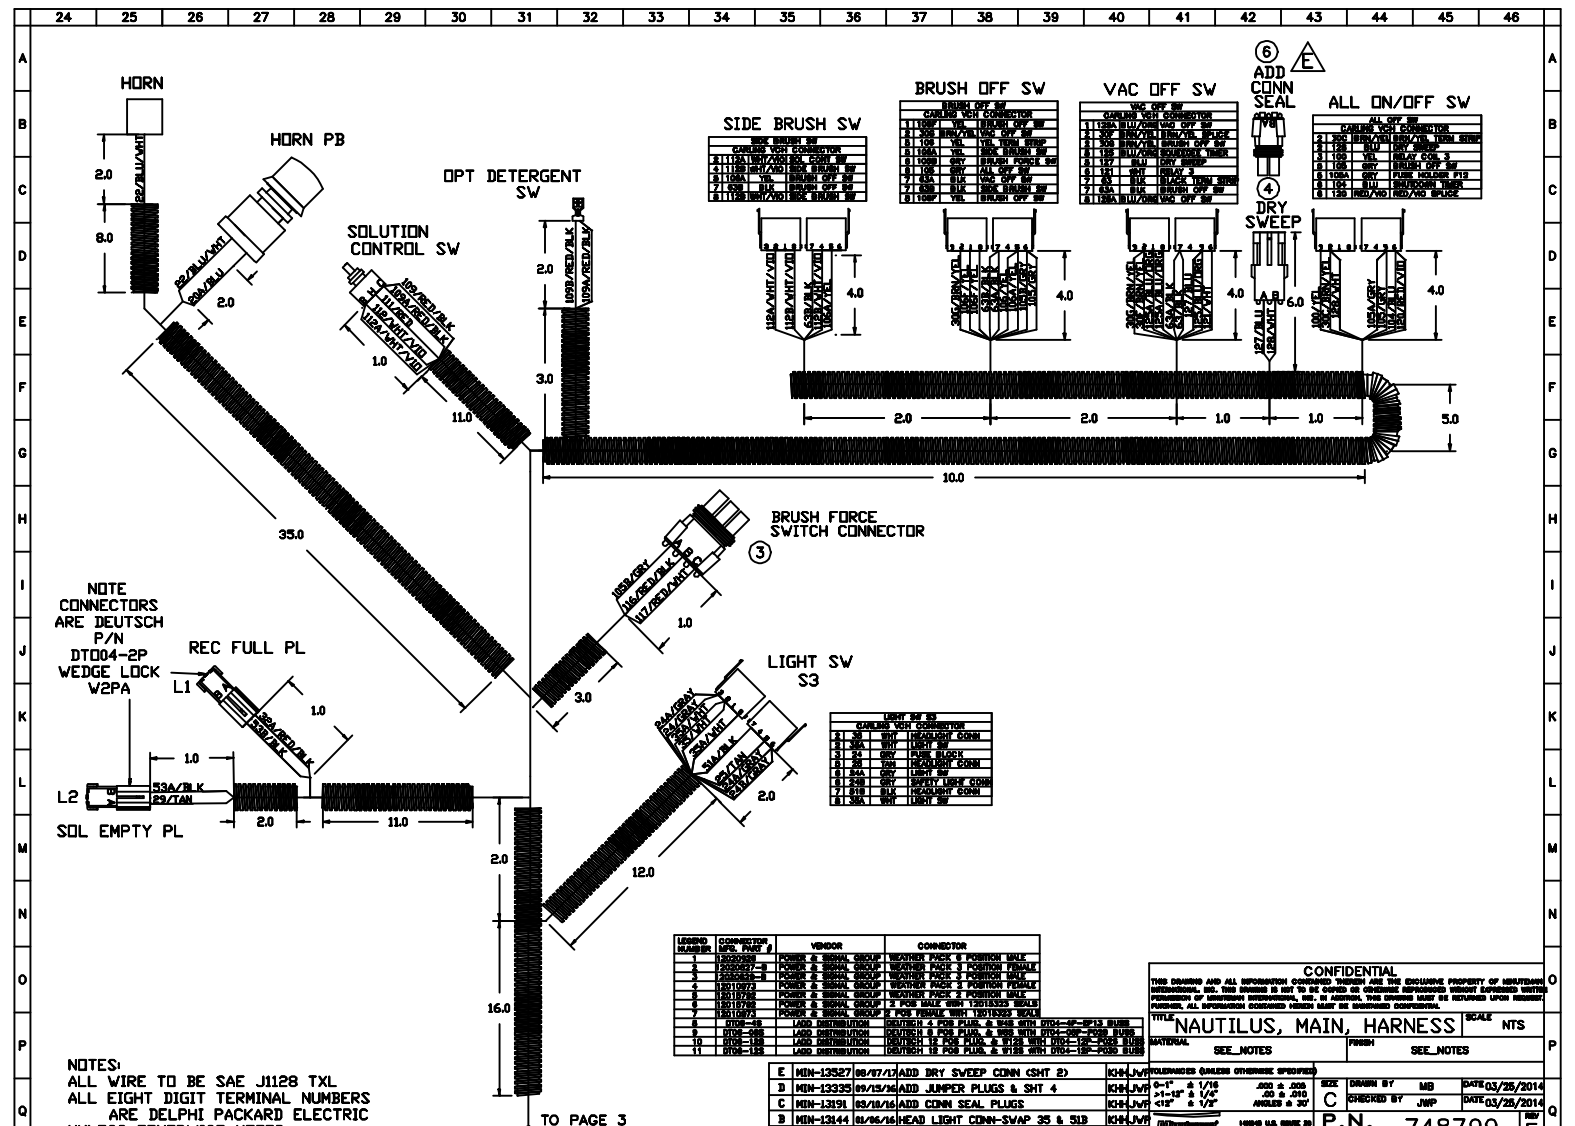


NOTES:
ALL WIRE TO BE SAE J1128 TXL
ALL EIGHT DIGIT TERMINAL NUMBERS ARE DELPHI PACKARD ELECTRIC UNLESS OTHERWISE NOTED
NAUTILUS, MAIN, HARNESS
P.N. 748799 E
SHEET 2 OF 4

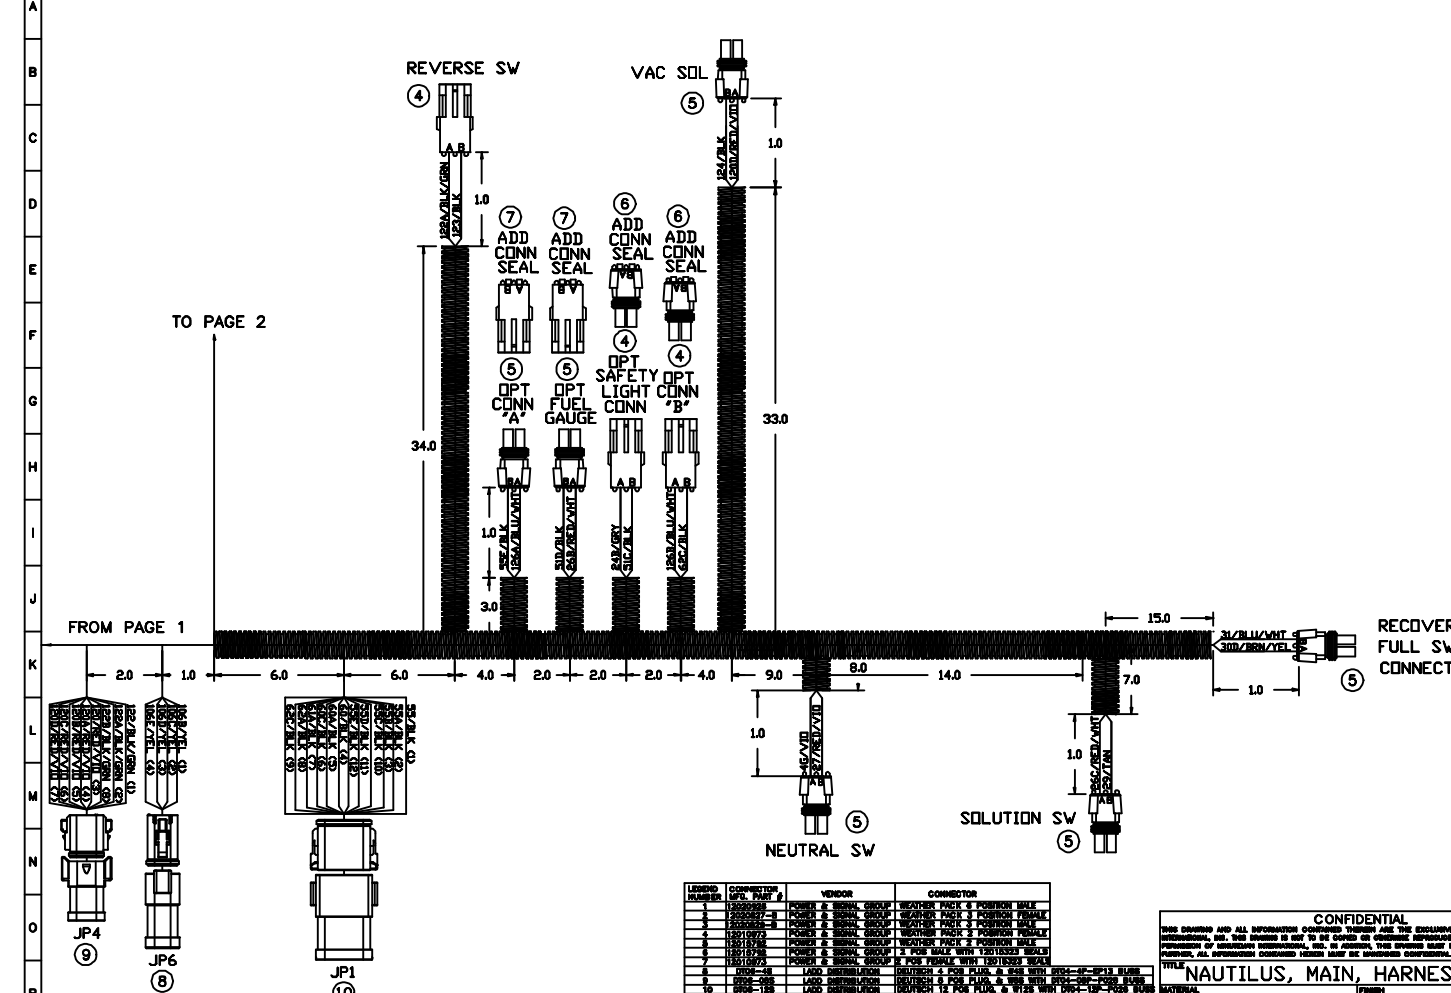


NOTES:
ALL WIRE TO BE SAE J1128 TXL
ALL EIGHT DIGIT TERMINAL NUMBERS ARE DELPHI PACKARD ELECTRIC UNLESS OTHERWISE NOTED
NAUTILUS, MAIN, HARNESS
P.N. 748799 E
SHEET 3 OF 4

| WIRE NO. | WIRE COLOR | WIRE GAUGE | FROM | PIN | TERMINAL | LOC/SHT | TO | PIN | TERMINAL | LOC/SHT |
|---|---|---|---|---|---|---|---|---|---|---|
| 4F | VIOLET | 16 | VIOLET TERM STRIP | - | 5/16" RING | 7B / 1 | ENG TIMER | E | 12124580 | 20B / 1 |
| 4G | VIOLET | 16 | VIOLET TERM STRIP | - | 5/16" RING | 7B / 1 | NEUTRAL SW CONN | A | 12124580 | 59M / 3 |
| 14A | TAN | 16 | SOV SEL SW (FROM 748990) | - | 1/4" QC YEL | - | ENG TIMER | F | 12124580 | 21G / 1 |
| 20 | BLUE | 16 | FUSE BLOCK | - | 1/4" QC | 4C / 1 | JP5 | 1 | 1082-14-0122 | 22L / 1 |
| 20A | BLUE | 16 | HORN PB | - | 1/4" QC YEL | 26E / 2 | JP5 | 11 | 1082-14-0122 | 22L / 1 |
| 20B | BLUE | 16 | ENG TIMER | D | 12124580 | 20G / 1 | JP5 | 12 | 1082-14-0122 | 22L / 1 |
| 22 | BLU/WHT | 16 | HORN PB | - | 1/4" QC | 26D / 2 | HORN | - | 1/4" QC | 25C / 2 |
| 23 | BLK/GRN | 16 | ENG TIMER | A | 12124580 | 20G / 1 | RELAY 3 | - | 1/4" QC | 13B / 1 |
| 24 | GREY | 16 | FUSE BLOCK | - | 1/4" QC | 4C / 1 | LIGHT SW | 3 | AMP 60253-2 | 34K / 2 |
| 24A | GREY | 16 | LIGHT SW | 3 | AMP 60253-2 | 34K / 2 | LIGHT SW | 6 | AMP 60253-2 | 34K / 2 |
| 24B | GREY | 16 | LIGHT SW | 6 | AMP 60253-2 | 34K / 2 | SAFETY LIGHT CONN | A | 12124582 | 55I / 3 |
| 25 | TAN | 16 | LIGHT SW | 5 | AMP 60253-2 | 35K / 2 | HEADLIGHT CONNECTOR | A | 12124582 | 9M / 1 |
| 26 | RED/WHT | 16 | FUSE BLOCK | F3 | 1/4" QC | 4C / 1 | JP5 | 2 | 1082-14-0122 | 22L / 1 |
| 26B | RED/WHT | 16 | FUEL LEVEL CONN | A | 12124580 | 54I / 3 | JP5 | 3 | 1082-14-0122 | 22L / 1 |
| 26C | RED/WHT | 16 | SOL TANK CONN | A | 12124580 | 63M / 3 | JP5 | 10 | 1082-14-0122 | 22L / 1 |
| 27 | RED/VIO | 16 | NEUTRAL SW CONN | B | 12124580 | 59M / 3 | RELAY COIL 1 | 86 | 1/4" QC | 9B / 1 |
| 29 | TAN | 16 | SOLUTION TANK CONN | B | 12124580 | 63M / 3 | L2 | A | DEUTSCH 1060-14-0122 | 25L / 2 |
| 30 | BRN/YEL | 16 | FUSE BLOCK | F4 | 1/4" QC | 4D / 1 | BRN/YEL TERM STRIP | - | 5/16" RING | 7A / 1 |
| 30A | BRN/YEL | 16 | FLOAT TIMER | E | 12124580 | 17E / 1 | JP3 | 3 | 1082-14-0122 | 15L / 1 |
| 30B | BRN/YEL | 16 | SHUTDOWN TIMER | D | 12124580 | 19E / 1 | JP3 | 4 | 1082-14-0122 | 15L / 1 |
| 30C | BRN/YEL | 16 | ALL OFF SWITCH | 2 | AMP 60253-2 | 43D / 2 | BRN/YEL TERM STRIP | - | 5/16" RING | 7A / 1 |
| 30D | BRN/YEL | 16 | REC FULL SWITCH CONN | A | 12124580 | 69K / 3 | JP3 | 5 | 1082-14-0122 | 15L / 1 |
| 30E | BRN/YEL | 16 | BRN/YEL TERM STRIP | - | 5/16" RING | 7A / 1 | JP3 | 6 | 1082-14-0122 | 15L / 1 |
| 30F | BRN/YEL | 16 | VAC OFF SW | 2 | AMP 60253-2 | 40D / 2 | JP3 | 7 | 1082-14-0122 | 15L / 1 |
| 30G | BRN/YEL | 16 | BRUSH OFF SW | 2 | AMP 60253-2 | 38D / 2 | VAC OFF SW | 2 | AMP 60253-2 | 40D / 2 |
| 31 | BLU/WHT | 16 | REC FULL SWITCH CONN | B | 12124580 | 69K / 3 | FLOAT TIMER | D | 12124580 | 18E / 1 |
| 32 | RED/BLU | 16 | FLOAT TIMER | F | 12124580 | 17E / 1 | RELAY COIL 2 | A | 1/4" QC YEL | 11B / 1 |
| 32A | RED/BLU | 16 | RELAY 2 COIL | A | 1/4" QC YEL | 11B / 1 | L1 CONN | A | 1060-14-0122 | 27K / 2 |
| 35 | WHITE | 16 | HEADLIGHT CONN | B | 12124582 | 9M / 1 | LIGHT SWITCH | 2 | AMP 60253-2 | 34K / 2 |
| 35A | WHITE | 16 | LIGHT SWITCH | 2 | AMP 60253-2 | 34K / 2 | LIGHT SWITCH | 8 | AMP 60253-2 | 34K / 2 |

| WIRE NO. | WIRE COLOR | WIRE GAUGE | FROM | PIN | TERMINAL | LOC/SHT | TO | PIN | TERMINAL | LOC/SHT |
|---|---|---|---|---|---|---|---|---|---|---|
| 51 | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 7D / 1 | JP3 | 3 | 1082-14-0122 | 14L / 1 |
| 51A | BLACK | 16 | LIGHT SWITCH | 7 | AMP 60253-2 | 34K / 2 | JP3 | 4 | 1082-14-0122 | 14L / 1 |
| 51B | BLACK | 16 | HEADLIGHT CONNECTOR | C | 12124582 | 9M / 1 | JP3 | 5 | 1082-14-0122 | 14L / 1 |
| 51C | BLACK | 16 | SAFETY LIGHT CONNECTOR | B | 12124582 | 55I / 3 | JP3 | 6 | 1082-14-0122 | 14L / 1 |
| 51D | BLACK | 16 | OPT FUEL GAUGE | B | 12124582 | 54I / 3 | JP3 | 7 | 1082-14-0122 | 14L / 1 |
| 52 | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 7D / 1 | RELAY 1 COIL | 85 | 1/4" QC YEL | 9B / 1 |
| 52A | BLACK | 16 | RELAY 1 COIL | 85 | 1/4" QC YEL | 9B / 1 | RELAY 1 COMMON | 30 | 1/4" QC YEL | 10B / 1 |
| 52B | BLACK | 16 | RELAY 1 COMMON | 30 | 1/4" QC YEL | 10B / 1 | RELAY 2 COIL | 85 | 1/4" QC YEL | 11B / 1 |
| 52C | BLACK | 16 | RELAY 2 COIL | 85 | 1/4 QC YEL | 11B / 1 | RELAY 2 COMMON | 30 | 1/4" QC YEL | 11B / 1 |
| 52D | BLACK | 16 | RELAY 2 COMMON | 30 | 1/4 QC YEL | 11B / 1 | RELAY 3 COIL | A | 1/4" QC YEL | 13B / 1 |
| 52E | BLACK | 16 | RELAY 3 COIL | A | 1/4 QC YEL | 13B / 1 | RELAY 3 COMMON 1 | 7 | 1/4" QC YEL | 13B / 1 |
| 52F | BLACK | 16 | RELAY 3 COMMON 1 | 7 | 1/4 QC YEL | 13B / 1 | RELAY 3 COMMON 2 | 4 | 1/4 QC | 13B / 1 |
| 53 | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 7D / 1 | JP3 | 1 | 1082-14-0122 | 15L / 1 |
| 53A | BLACK | 16 | L2 | B | 1060-14-0122 | 25L / 2 | JP3 | 2 | 1082-14-0122 | 15L / 1 |
| 53B | BLACK | 16 | L1 | B | 1060-14-0122 | 27K / 2 | JP3 | 8 | 1082-14-0122 | 15L / 1 |
| 54 | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 7D / 1 | PROP VALVE DRIVER CONN | B | 12124580 | 1J / 1 |
| 55 | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 8D / 1 | JP1 | 1 | 1082-14-0122 | 51M / 3 |
| 55A | BLACK | 16 | SV2 CONN | B | 12124580 | 8H / 1 | JP1 | 2 | 1082-14-0122 | 51M / 3 |
| 55B | BLACK | 16 | SV3 CONN | B | 12124580 | 8G / 1 | JP1 | 3 | 1082-14-0122 | 51M / 3 |
| 55C | BLACK | 16 | SV6 CONN | B | 12124580 | 11H / 1 | JP1 | 10 | 1082-14-0122 | 51M / 3 |
| 55D | BLACK | 16 | SV5 CONN | B | 12124580 | 13H / 1 | JP1 | 11 | 1082-14-0122 | 51M / 3 |
| 55E | BLACK | 16 | OPT CONN "A" | B | 12124580 | 54J / 3 | JP1 | 12 | 1082-14-0122 | 51M / 3 |
| 56A | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 8D / 1 | SV-14 | - | 1/4" QC YEL | 4O / 1 |
| 56B | BLACK | 16 | SV-14 | - | 1/4" QC YEL | 4O / 1 | SV-13 | - | 1/4" QC | 5Q / 1 |
| 57 | BLACK | 10 | BLACK TERM STRIP | - | 5/16" RING | 7C / 1 | BLACK TERM STRIP | - | 5/16" RING | 8C / 1 |
| 60 | BLACK | 16 | BLACK TERM STRIP | - | 5/16" RING | 8D / 1 | JP1 | 4 | 1082-14-0122 | 51M / 3 |
| 60A | BLACK | 16 | SQUEEZEE TIMER | B | 12124580 | 15G / 1 | JP1 | 5 | 1082-14-0122 | 51M / 3 |
| 60B | BLACK | 16 | SQUEEZEE TIMER | C | 12124580 | 15G / 1 | SQUEEZEE TIMER | E | 12124580 | 15G / 1 |
| 60C | BLACK | 16 | VAC TIMER | B | 12124580 | 17G / 1 | JP1 | 6 | 1082-14-0122 | 51M / 3 |
| 60D | BLACK | 16 | VAC TIMER | C | 12124580 | 18G / 1 | VAC TIMER | E | 12124580 | 18G / 1 |
| 61A | BLACK | 16 | ENGINE TIMER | B | 12124580 | 20G / 1 | JP1 | 7 | 1082-14-0122 | 51M / 3 |
| 61B | BLACK | 16 | ENGINE TIMER | C | 12124580 | 20G / 1 | MOTION TIMER | B | 12124580 | 21E / 1 |
| 62A | BLACK | 16 | FLOAT TIMER | B | 12124580 | 18E / 1 | JP1 | 8 | 1082-14-0122 | 51M / 3 |
| 62B | BLACK | 16 | FLOAT TIMER | C | 12124580 | 18E / 1 | SHUTDOWN TIMER | B | 12124580 | 19E / 1 |
| 62C | BLACK | 16 | OPT CONN "B" | B | 12124582 | 56J / 3 | JP1 | 9 | 1082-14-0122 | 51M / 3 |
| 63 | BLACK | 16 | VAC OFF SW | 7 | AMP 60253-2 | 41D / 2 | BLACK TERM STRIP | - | 1/4" RING | 8D / 1 |
| 63A | BLACK | 16 | VAC OFF SW | 7 | AMP 60253-2 | 41D / 2 | BRUSH OFF SW | 7 | AMP 60253-2 | 38D / 2 |
| 63B | BLACK | 16 | BRUSH OFF SW | 7 | AMP 60253-2 | 38D / 2 | SIDE BRUSH SW | 7 | AMP 60253-2 | 35D / 1 |
| 100 | YEL | 16 | ALL OFF SW | 3 | AMP 60253-2 | 43D / 2 | RELAY COIL 3 | A | 1/4" QC | 12B / 1 |
| 102 | BRN | 16 | RELAY 2 | 4 | 1/4" QC | 11B / 1 | SHUT DOWN TIMER | A | 12124580 | 18E / 1 |
| 103 | ORG | 16 | SHUTDOWN TIMER | E | 12124580 | 18E / 1 | FUSE BLOCK | F0 | 1/4" QC YEL | 4D / 1 |
| 103A | ORG | 16 | FUSE BLOCK | F5 | 1/4" QC YEL | 4D / 1 | MOTION TIMER | D | 12124580 | 21E / 1 |
| 104 | BLUE | 16 | SHUTDOWN TIMER | F | 12124580 | 19E / 1 | ALL OFF SW | 6 | AMP 60253-2 | 44D / 2 |
| 105 | GREY | 16 | BRUSH OFF SW | 6 | AMP 60253-2 | 38D / 2 | ALL OFF SW | 5 | AMP 60253-2 | 44D / 2 |
| 105A | GREY | 16 | FUSE HOLDER F12 | - | 1/4" QC | 3H / 1 | ALL OFF SW | 5 | AMP 60253-2 | 44D / 2 |
| 105B | GREY | 16 | BRUSH OFF SW | 6 | 1/4" QC | 38D / 2 | BRUSH FORCE SW | A | 12124580 | 33I / 2 |

| WIRE NO. | WIRE COLOR | WIRE GAUGE | FROM | PIN | TERMINAL | LOC/SHT | TO | PIN | TERMINAL | LOC/SHT |
|---|---|---|---|---|---|---|---|---|---|---|
| 106 | YEL | 16 | YELLOW TERM STRIP | - | 5/16" RING | 8A / 1 | BRUSH OFF SW | 5 | AMP 60253-2 | 38D / 2 |
| 106A | YEL | 16 | BRUSH OFF SW | 5 | AMP 60253-2 | 38D / 2 | SIDE BRUSH SW | 5 | AMP 60253-2 | 35D / 2 |
| 106B | YEL | 16 | YELLOW TERM STRIP | - | 5/16" RING | 8A / 1 | JP6 | 1 | 1082-14-0122 | 48M / 3 |
| 106C | YEL | 16 | MOTION TIMER | E | 12124580 | 22E / 1 | JP6 | 2 | 1082-14-0122 | 48M / 3 |
| 106D | YEL | 16 | SV-6 | A | 12124580 | 11H / 1 | JP6 | 3 | 1082-14-0122 | 48M / 3 |
| 106E | YEL | 16 | SV-5 | A | 12124580 | 14H / 1 | JP6 | 4 | 1082-14-0122 | 48M / 3 |
| 106F | YEL | 16 | BRUSH OFF SW | 1 | AMP 60253-2 | 38D / 2 | BRUSH OFF SW | 8 | AMP 60253-2 | 38D / 2 |
| 108 | BLU/WHT | 16 | RELAY 1 NC | 87 | 1/4" QC | 10B / 1 | MOTION TIMER | A | 12124580 | 21E / 1 |
| 109 | RED/BLU | 16 | MOTION TIMER | F | 12124580 | 22E / 1 | SOL CONT SW | C | 1/4" QC YEL | 32D / 2 |
| 109A | RED/BLU | 16 | SOL CONT SW | C | 1/4" QC YEL | 29D / 2 | OPT DETERGENT SW | - | 1/4" QC YEL | 32D / 2 |
| 109B | RED/BLU | 16 | OPT DETERGENT SW | - | 1/4" QC YEL | 32D / 2 | JP5 | 5 | 1082-14-0122 | 22L / 1 |
| 109C | RED/BLU | 16 | SV2 CONN | A | 12124580 | 8I / 1 | JP5 | 6 | 1082-14-0122 | 22L / 1 |
| 109D | RED/BLU | 16 | SV3 CONN | A | 12124580 | 8G / 1 | JP5 | 7 | 1082-14-0122 | 22L / 1 |
| 111 | RED | 16 | SOL CONT SW | H | 1/4" QC | 29E / 2 | SOL SV-14 | - | 1/4" QC | 4O / 1 |
| 112 | WHT/VIO | 16 | SOL CONT SW | B | 1/4" QC YEL | 29E / 2 | SOL SV-13 | - | 1/4" QC | 5Q / 1 |
| 112A | WHT/VIO | 16 | SOL CONT SW | E | 1/4" QC YEL | 29E / 2 | SIDE BRUSH SW | 2 | AMP 60253-2 | 35D / 2 |
| 112B | WHT/VIO | 16 | SIDE BRUSH SW | 4 | AMP 60253-2 | 35D / 2 | SIDE BRUSH SW | 8 | AMP 60253-2 | 35D / 2 |
| 115 | RED | 16 | PROP VALVE DRIVER CONN | A | 12124580 | 1I / 1 | FUSE HOLDER F12 | - | 1/4" QC | 3H / 1 |
| 116 | RED/BLK | 16 | BRUSH FORCE SW CONN | B | 12124580 | 33I / 2 | PROP VALVE DRIVER | E | 12124580 | 1I / 1 |
| 117 | RED/WHT | 16 | BRUSH FORCE SW CONN | C | 12124580 | 33I / 2 | PROP VALVE DRIVER | F | 12124580 | 1I / 1 |
| 118 | BLUE | 16 | PROP VALVE DRIVER CONN | D | 12124580 | 1I / 1 | SV-4 | A | 12124580 | 4G / 1 |
| 119 | BLK/GRN | 16 | PROP VALVE DRIVER CONN | C | 12124580 | 1I / 1 | SV-4 | B | 12124580 | 4G / 1 |
| 120 | RED/VIO | 16 | ALL OFF SW | 5 | AMP 60253-2 | 44D / 2 | JP4 | 3 | 1082-14-0122 | 47M / 3 |
| 120A | RED/VIO | 16 | SQUEEZEE TIMER CONN | D | 12124580 | 15G / 1 | JP4 | 4 | 1082-14-0122 | 47M / 3 |
| 120B | RED/VIO | 16 | VAC TIMER CONN | D | 12124580 | 18G / 1 | JP4 | 5 | 1082-14-0122 | 47M / 3 |
| 120C | RED/VIO | 16 | SV-7 | A | 12124580 | 7F / 1 | JP4 | 6 | 1082-14-0122 | 47M / 3 |
| 120D | RED/VIO | 16 | SV-1 VAC SOL | A | 12124580 | 57B / 3 | JP4 | 7 | 1082-14-0122 | 47M / 3 |
| 121 | WHITE | 16 | RELAY 3 | - | 1/4" QC | 13B / 1 | VAC OFF SW | 6 | AMP 60253-2 | 41D / 2 |
| 122 | BLK/GRN | 16 | SQUEEZEE TIMER CONN | F | 12124580 | 15G / 1 | JP4 | 1 | 1082-14-0122 | 48M / 3 |
| 122A | BLK/GRN | 16 | REVERSE SWITCH CONN | A | 12124582 | 53D / 3 | JP4 | 2 | 1082-14-0122 | 48M / 3 |
| 122B | BLK/GRN | 16 | VAC TIMER CONN | A | 12124580 | 17G / 1 | JP4 | 8 | 1082-14-0122 | 48M / 3 |
| 123 | BLACK | 16 | REVERSE SWITCH CONN | B | 12124582 | 53D / 3 | SV-7 CONN | B | 12124580 | 7F / 1 |
| 124 | BLACK | 16 | VAC TIMER CONN | F | 12124580 | 18G / 1 | SV-1 VAC SOL | B | 12124580 | 57B / 3 |
| 125 | BLU/ORG | 16 | SQUEEZEE TIMER CONN | A | 12124580 | 15G / 1 | VAC OFF SW | 5 | AMP 60253-2 | 41D / 2 |
| 125A | BLU/ORG | 16 | VAC OFF SW | 1 | AMP 60253-2 | 41D / 2 | VAC OFF SW | 8 | AMP 60253-2 | 41D / 2 |
| 126 | BLU/WHT | 16 | FUSE BLOCK | F8 | 1/4" QC | 3D / 1 | JP5 | 4 | 1082-14-0122 | 22L / 1 |
| 126A | BLU/WHT | 16 | OPT CONN "A" | A | 12124580 | 54J / 3 | JP5 | 8 | 1082-14-0122 | 22L / 1 |
| 126B | BLU/WHT | 16 | OPT CONN "B" | A | 12124582 | 56J / 3 | JP5 | 9 | 1082-14-0122 | 22L / 1 |
| 127 | BLUE | 16 | DRY SWEEP | A | 12124582 | 42E / 2 | VAC OFF SW | 5 | AMP 60253-2 | 41D / 2 |
| 128 | WHITE | 16 | DRY SWEEP | B | 12124582 | 42E / 2 | ALL OFF SW | 2 | AMP 60253-2 | 43D / 2 |

NOTES:
ALL WIRE TO BE SAE J1128 TXL
ALL EIGHT DIGIT TERMINAL NUMBERS ARE DELPHI PACKARD ELECTRIC UNLESS OTHERWISE NOTED
NAUTILUS, MAIN, HARNESS
P.N. 748799 E
SHEET 4 OF 4