

Output	21.8 - 27.5 kW
rpm	2400 - 3000 rpm

EU Stage5 Ready

Cleanest engine in its category

No Scheduled Maintenance DPF* for 6,000 hours

Seamless operation in the field

Tough and Reliable Power


Best in Class Fuel Consumption

Performance Curves









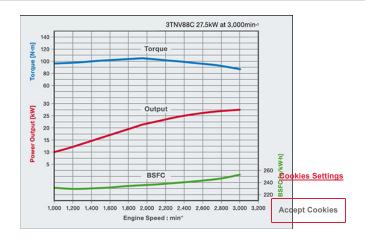

Dimensions







Specifications

Models		3TNV88C
Emission Compliance		EPA Tier 4 / EU Stage III A / Switzerland FOEN / Korea Tier4 / Japan 2013
Fuel Injection		Direct Injection (DI)
Aspiration		NA
Fuel Injection System		Common Rail
Intake Throttle Value		Standard
Cooled EGR		Standard
Aftertreatment		DPF
No. of Cylinders		3
Bore x Stroke	mm	88 x 90
Displacement	L	1.642
Rated Output (Gross)	kW/min-1	21.8~27.5/2,400~3,000
	PS/min-1	29.6~37.4/2,400~3,000
Max. Torque (Gross)	N-m/min-1	105/1,560~1,950
Overall Length x Width x Height	mm	781 x 541 x 724
Weight (Dry)*	kg	170

*:DPF Layout is on Flywheel Housing

< Please contact us >

Monday-Friday: 8:30 a.m. – 5:00 p.m. Toll Free Number: **18005726409**

TEL: 0124-6409000

Mobile Number: +919810443993


Customer care Mail ID: customercare@yanmar.com

Cookies Settings

Accept Cookies

Downloads

We use cookies to improve your experience on our website. We share information about your use of our website with our social media, advertising and analytics partners. By continuing to browse the website, it is assumed that you agree to the use of cookies. To alter the types of cookies we use click "Cookies Settings". Cookie Policy

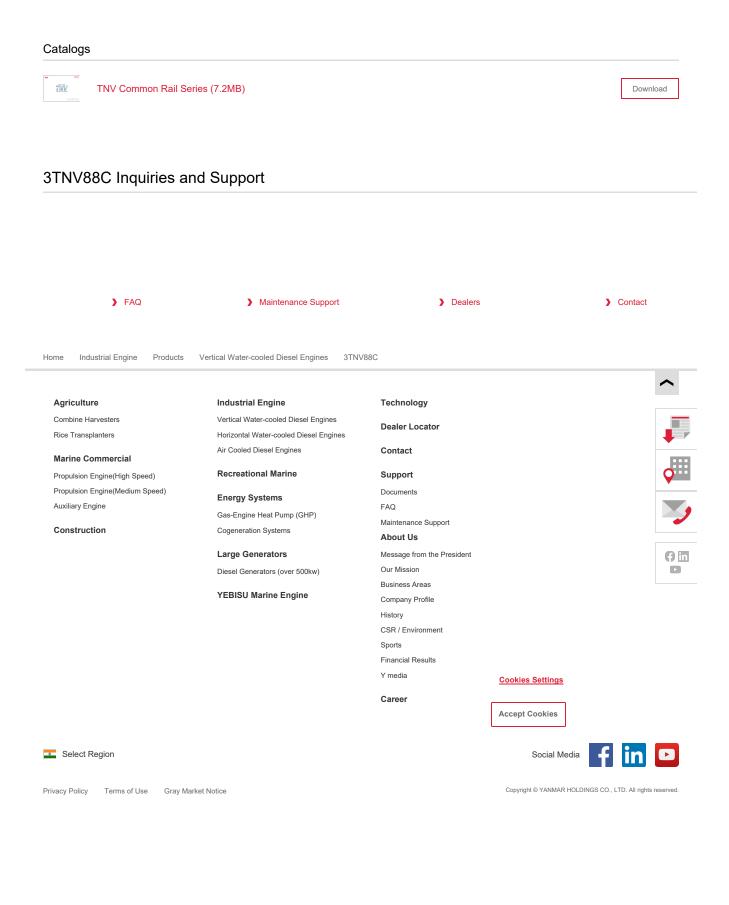

We use cookies to improve your experience on our website. We share information about your use of our website with our social media, advertising and analytics partners. By continuing to browse the website, it is assumed that you agree to the use of cookies. To alter the types of cookies we use click "Cookies Settings". Cookie Policy