

Assembly Manual

Comfort driver's seat (7093.25)

Introduction

Foreword

The installation procedures described in this assembly manual should only be undertaken by a Hako service centre or a workshop authorised by Hako. Members of staff with the required level of training and expertise are only guaranteed in the said workshops. This assembly manual may be used only in conjunction with the operating manual of the machine.

Safety instructions

Please observe the general safety regulations of the corresponding machine in the relevant operating manual.

Place the machine on a level surface and secure it with the parking brake. Switch the machine off and pull out the key.

We would expressly advise you that no legal claims may be asserted based on the contents of this manual. In the case of necessary repair work, please make sure that only original spare parts are used. Only original spare parts guarantee constant and reliable operational readiness of your machine. We reserve the right to make changes in the interests of further technical development.

Valid as from: September 2017

Hako GmbH
23843 Bad Oldesloe, Germany
Hamburger Str. 209-239
Phone +49 4531 806-0

1 Comfort driver's seat

1.1 Parts list

- 1x comfort driver's seat compl.
- Assembly manual

1.2 Removing the standard driver's seat

1. Swivel up the seat console.
2. Disconnect connector from seat contact switch (Fig. 1/1).
3. Push seat adjusting lever upwards (Fig. 1/2) and pull seat all the way out of the rails (Fig. 1/3).
4. Move stop screw downwards (Fig. 1/4).

1.3 Installing the comfort driver's seat

1. Remove the two loose rails beneath the comfort seat.
2. Slide the comfort seat onto the existing rails of the seat console.
3. Lead connector of seat contact switch between seat and seat plate to seat contact switch and connect (Fig. 1/5).

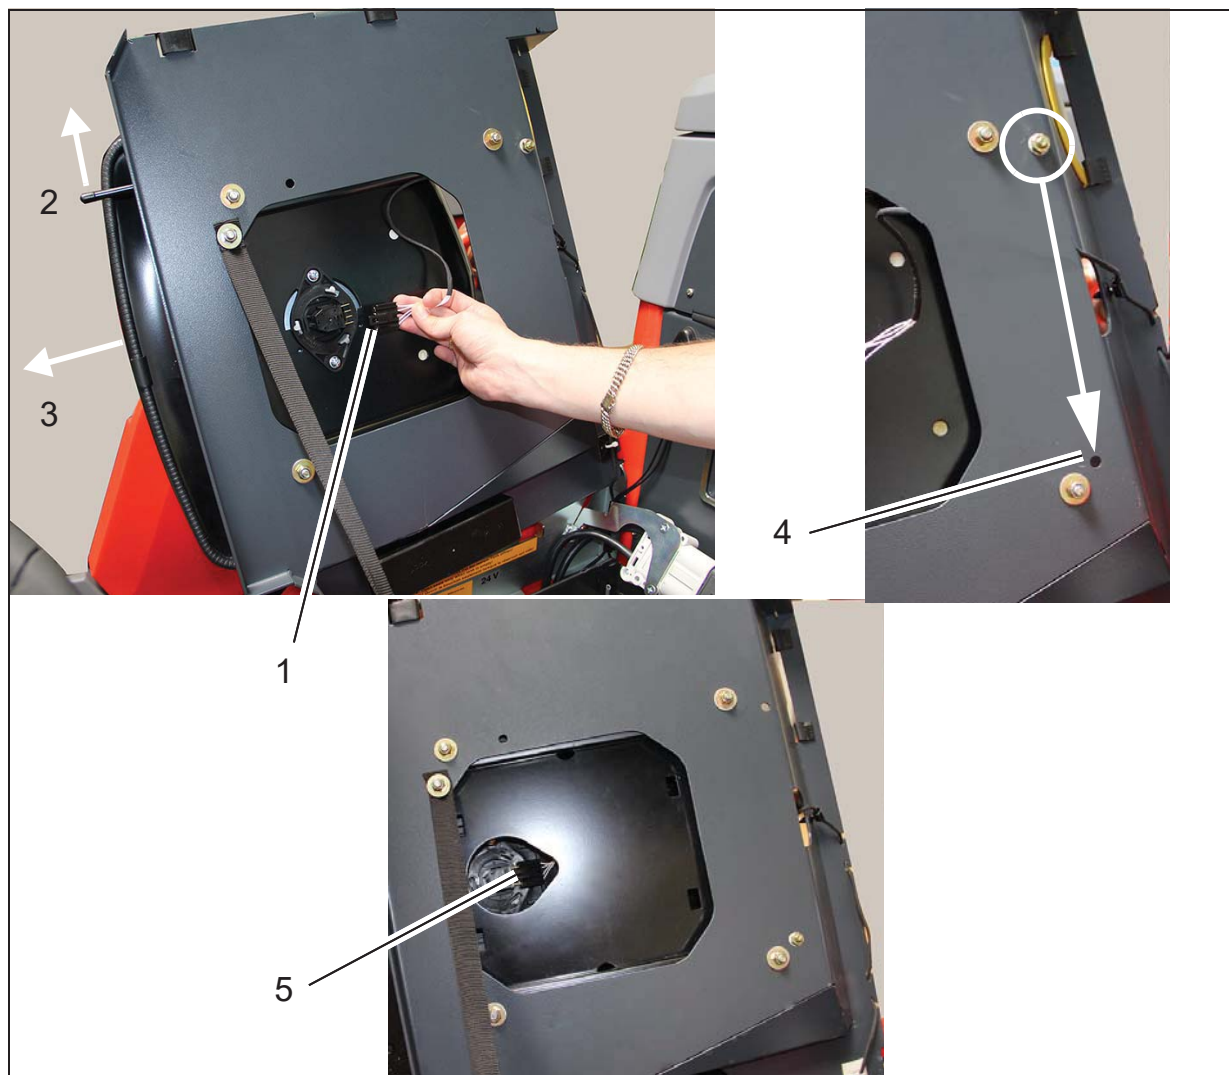


Fig. 1

Advanced Technology for a Cleaner, Better Environment

88-10-3124 - 3650-36



Hako GmbH • Head Office • Hamburger Str. 209-239 • 23843 Bad Oldesloe • Germany
Phone +49 4531 806-0 • Fax +49 4531 806-338